



Engine compartment:
Cowl: Treatment via existing plugged holes for washer. Flip plastic plate, treat with caution in underneath.
Treat on top of longitudinal members, under airfilter box, engine suspension right side, reinforcements on spring strut right side. Treat locking plate. See fig 3 and 4 for correct treatment.

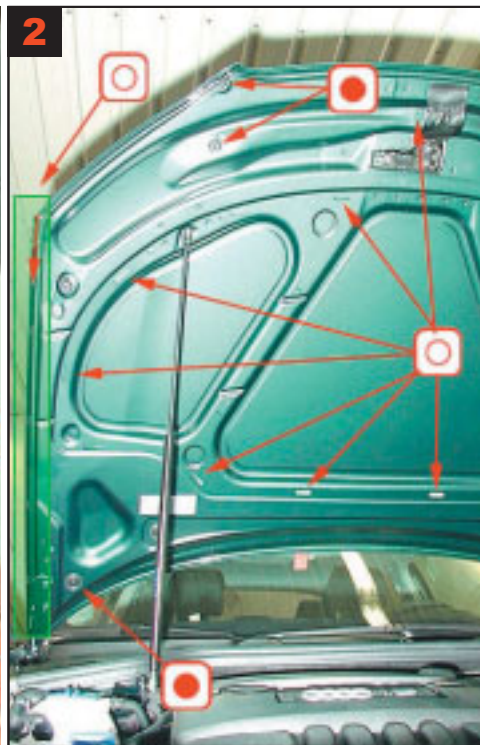


Bonnet lid:
Treat via existing and plugged holes.

Front door
No treatment
pressure sensor
for AIRBAG

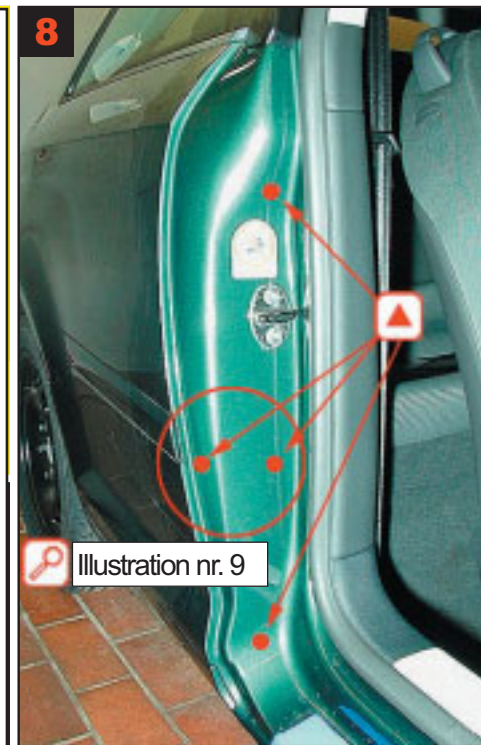


B-pillar and rear wing:
Treat via 4 drilled holes for correct treatment. See fig 9 for drilling at correct level.

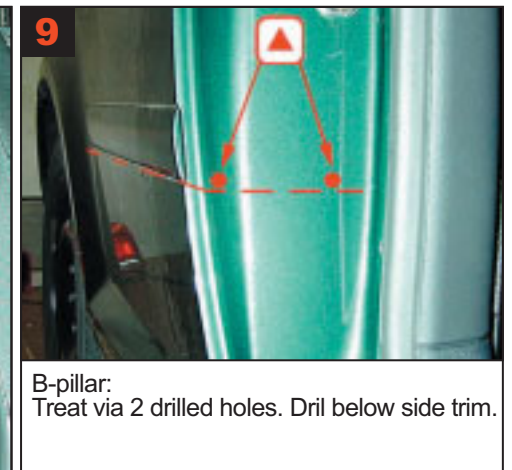

B-pillar:
Treat via 2 drilled holes. Drill below side trim.



Fig: correct drilling of top member.

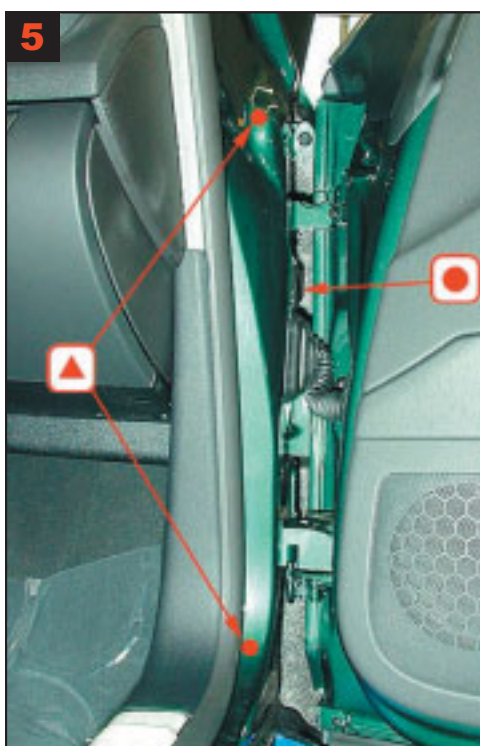


A-pillar:
Treat via 2 drilled holes as well as via existing plugged hole.



Front wing/wheel arch liner:
Treat via existing holes and gaps.


Front door
No treatment
pressure sensor
for AIRBAG

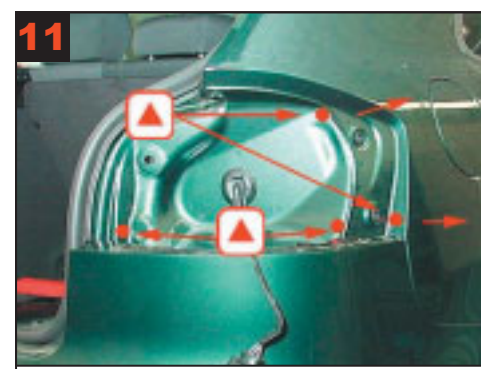


Rear wing/rear panel:
4 drill holes for correct treatment. Rear wing:
Treat with lance.



Rear panel:
Remove plastic plate for correct treatment of panel.

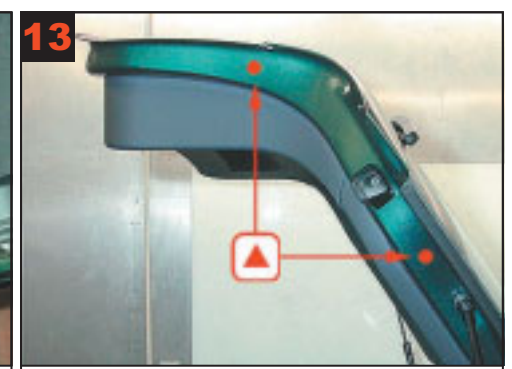

Tailgate side:
Drill 2 holes for correct treatment.

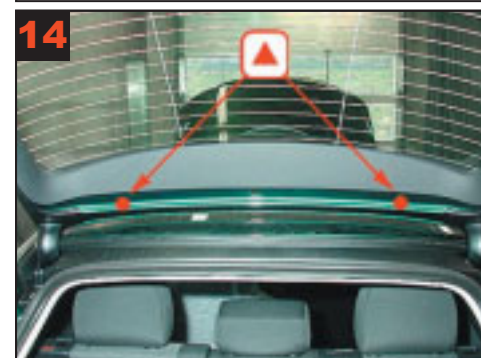


Tailgate by roof:
Treat via 2 drilled holes.




Underside


General view of underside

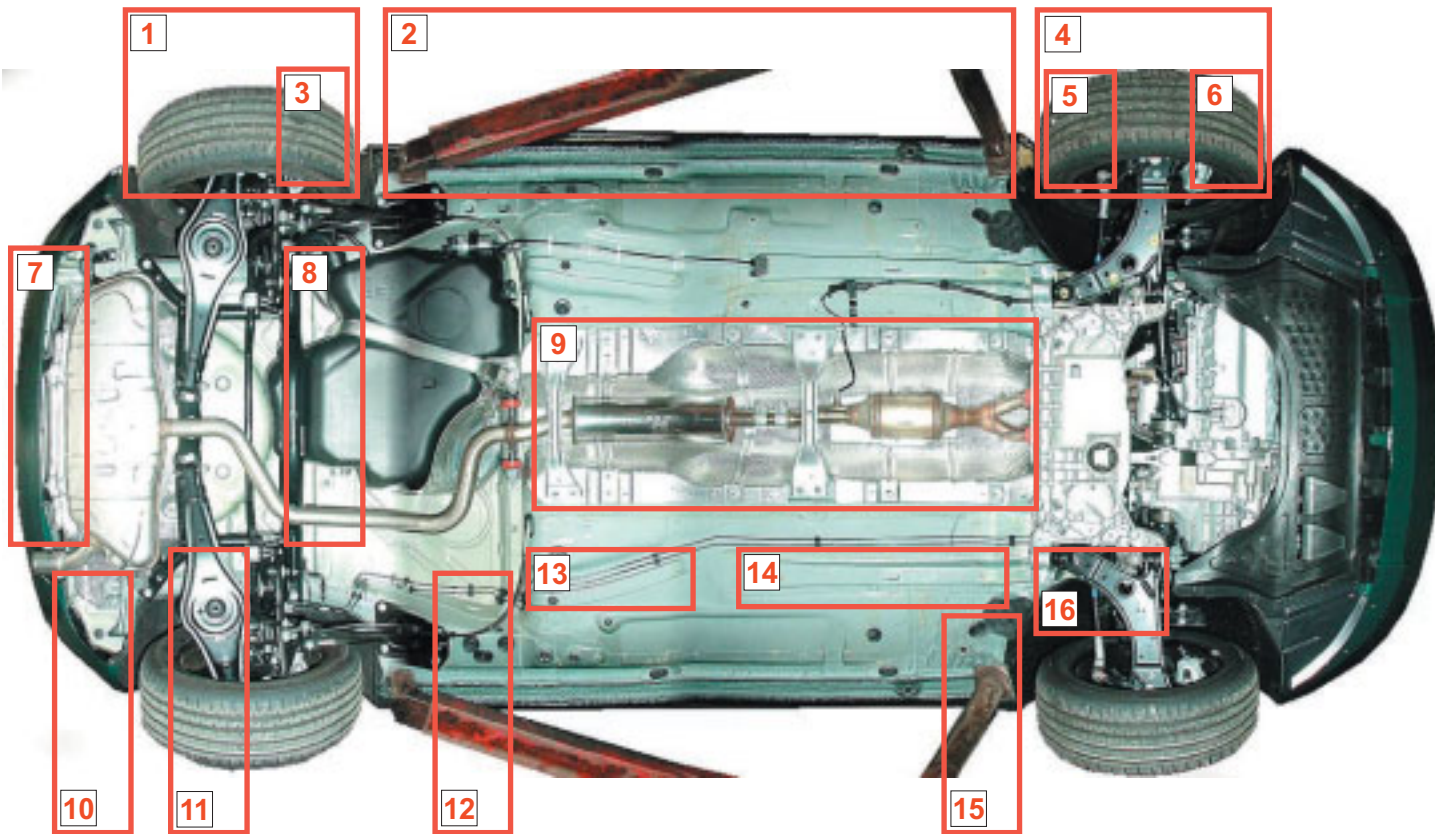


6 Wheel arch front/longitudinal member:
Treat via existing hole.

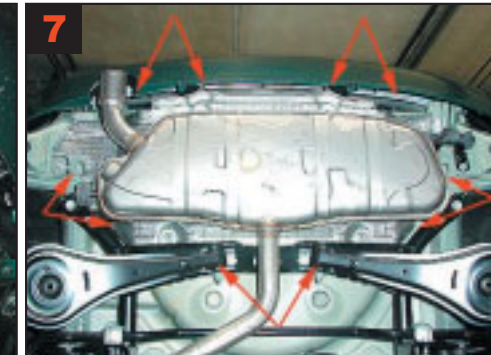


7 Rear panel: Treatment between bumper
and rear panel.

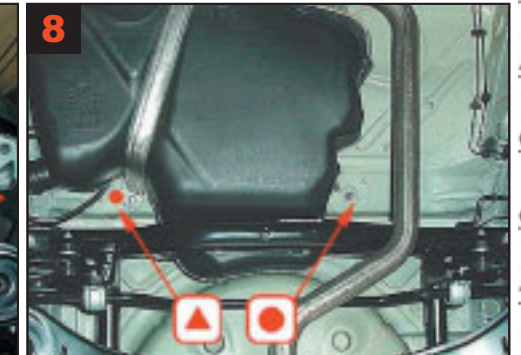


8 Cross member above tank:
Treat via 1 drilled hole and existing plugged
hole.

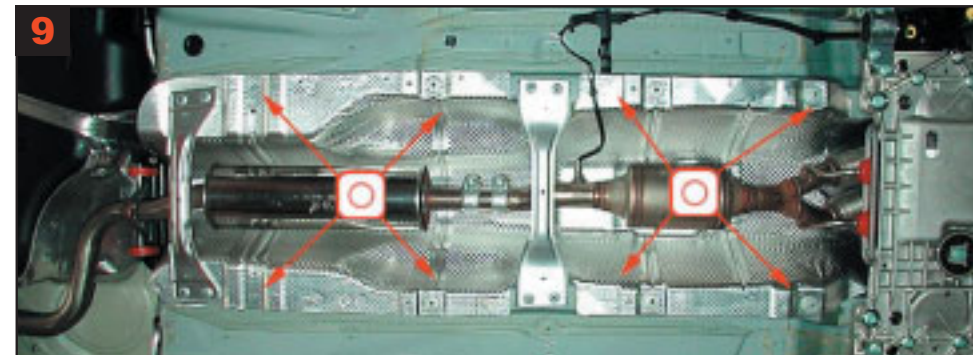


9 Cover plate centre:
Treatment via existing holes behind cover plate.

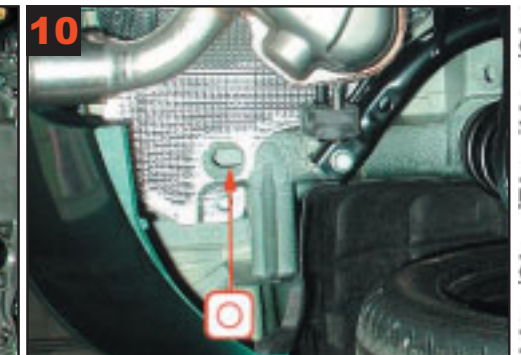

10 Longitudinal member rear:
Treat via existing holes.

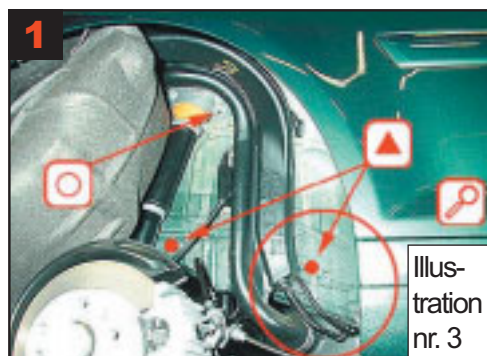


1 Wheel arch rear and panels:
Flip out wheel arch liner. Treat via 2 drilled
holes as well as via existing holes. See fig 3
for correct treatment.

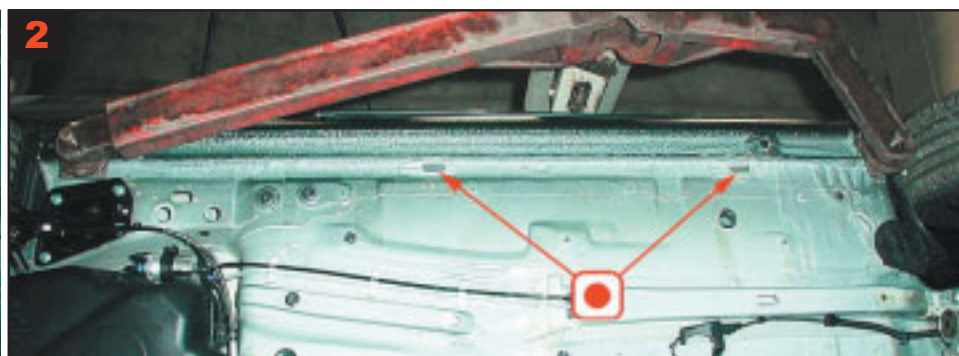


2 Panels:
Treatment via 2 plugged holes. Note that panel
may in places be filled with foam.



11 Longitudinal members in wheel arch rear:
Treat via existing holes.

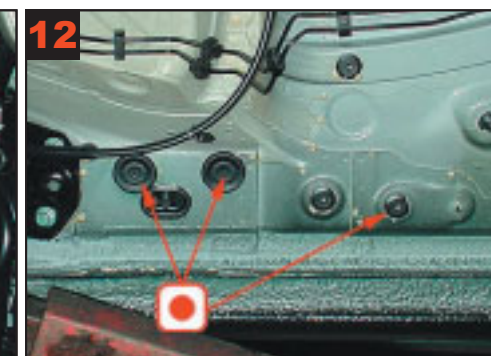


12 Longitudinal member before wheel arch
rear:
Treat via 3 existing plugged holes.

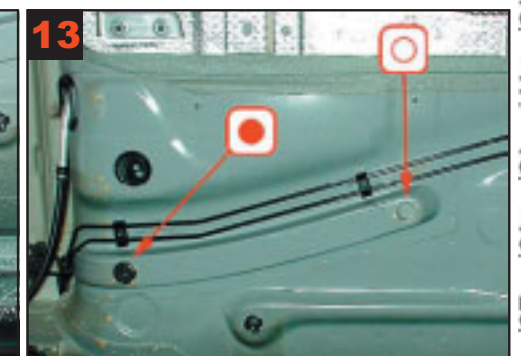


13 Longitudinal members centre rear:
Treat via existing and plugged holes.




3 Fig. for correct treatment:
Treatment with long lance.

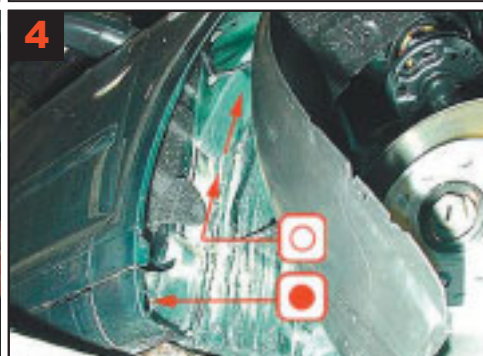

4 Wheel arch front/A-pillar and top member:
Flip out wheel arch liner. Treatment of top
member and reinforcement via existing holes
and gaps. A-pillar: Treat via existing plugged
hole.

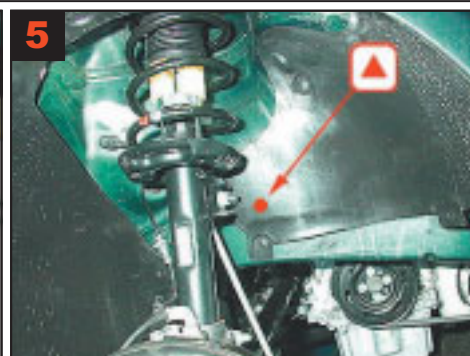

5 Wheel arch front: Drill 1 hole for correct
treatment.

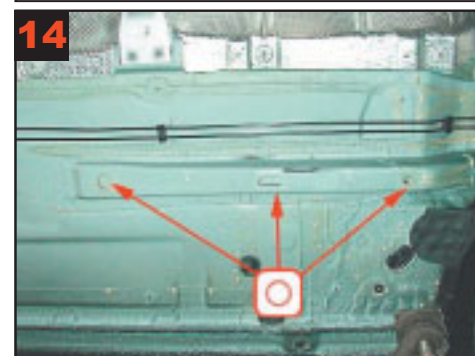

14 Longitudinal members centre:
Treat via existing holes.



15 Small cross member after front wheel arch:
Treat via existing plugged hole.



16 Reinforcements front:
wheel suspension - treat via existing holes.